Brook

Game Controller Super Converters

Magic Box NG-ORG

PS3/PS4 NEOGEO Controller Adapter

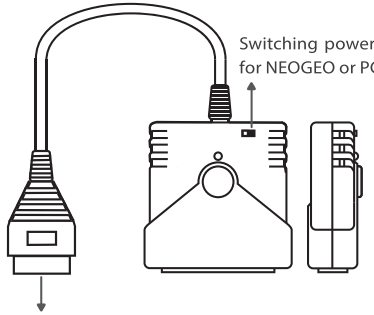

step. 1

Connect the Super Converter to the port of NEOGEO.

step. 2

Connect the PS3/PS4 game controller to the Super Converter via a standard USB cable. The registration of the controller starts automatically and finishes when the port indicator light on the controller turns on or when pushing a button triggers a response on the screen.

step. 3

The USB cable is removed and the controller is ready for use as wireless.

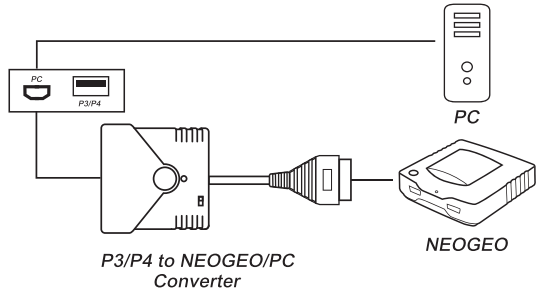

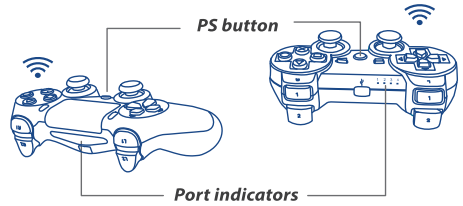

- Each Super Converter can handle one PS3/PS4 game controller at a time.
- Wireless PS3/PS4 controllers connect to the Super Converter automatically. In case they don't, please try to re-register the controller with the USB cable.

NEOGEO	PC	PS4	PS3
UP	DPad-UP	DPad-UP	DPad-UP
DOWN	DPad-Down	DPad-Down	DPad-Down
LEFT	DPad-Left	DPad-Left	DPad-Left
RIGHT	DPad-Right	DPad-Right	DPad-Right
Button_A	×	×	×
Button_B	○	○	○
Button_C	□	□	□
Button_D	△	△	△
START	START	OPTIONS	START
SELECT (CREDIT)	SELECT	SHARE	SELECT
LEFT-RIGHT	Lx	Lx	Lx
UP-DOWN	Ly	Ly	Ly
	Ry	Ry	Ry
	Rx	Rx	Rx
KICK_1	L1	L1	L1
KICK_2	R1	R1	R1
Button_A	L2	L2	L2
Button_B	R2	R2	R2
Button_C	L3	L3	L3
Button_D	R3	R3	R3
	XBOX	PS Key	PS Key

Procedure for assigning a Turbo button

step. 1

Press the PS and SELECT buttons (Press the PS and SHARE buttons for PS4 Gamepad) at the same time. The converter's LED will turn on to indicate that you enter the settings mode.

step. 2

Press the SELECT button (Press the SHARE button for PS4 Gamepad) and the button you want to assign as the Turbo button at the same time. More than one button can be chosen.

step. 3

Press the START button(Press the OPTIONS button for PS4 Gamepad) to complete the setting.

step. 4

Press the PS button to exit the settings mode.

Procedure for clearing a Turbo button assignment

step.1

Press the PS and SELECT buttons (Press the PS and SHARE buttons for PS4 Gamepad) at the same time. The converter's LED will turn on to indicate that you enter the settings mode.

step. 2

Press the SELECT and START buttons (Press the SHARE and OPTIONS buttons for PS4 Gamepad) at the same time to clear the current setting.

step. 3

Press the PS button to exit the settings mode. The converter's LED will turn off.

For more details please visit our official website at
www.brookaccessory.com

Procedure for customizing buttons

step.1

Press the PS and START (Press the PS and OPTIONS buttons for PS4 Gamepad) buttons at the same time. The converter's LED will turn on to indicate that you enter the settings mode.

step. 2

Transfer a function from one button to another.

(Example: You want to use □ to do what ○ does now.)

1. Press the ○ button.
2. Press and hold the SELECT button (Press and hold the SHARE button for PS4 Gamepad), then press the □ button.
3. Press the START button (Press the OPTIONS button for PS4 Gamepad) to complete the setting.

Transfer a function from one button to multiple buttons.

(Example: You want to use ×, △ or □ to do what ○ does now.)

1. Press the ○ button.
2. Press and hold the SELECT button (Press and hold the SHARE button for PS4 Gamepad), then press ×, △ and □ button one by one.(any sequence will do.)
3. Press the START button (Press the OPTIONS button for PS4 Gamepad) to complete the setting. setting.

step. 3

Press the PS button to exit the settings mode.

Procedure for resetting all customized buttons

step.1

Press the PS and START buttons (Press the PS and OPTIONS buttons for PS4 Gamepad) at the same time to enter the settings mode.

step. 2

Press the SELECT and START buttons (Press the SHARE and OPTIONS buttons for PS4 Gamepad) at the same time to clear the customized setting.

step. 3

Press the PS button to exit the settings mode.

For more details please visit our official website at
www.brookaccessory.com