



Firmware Update Guide

PS3/PS4 to NEOGEO Super Converter




This document describes how to update the firmware of Brook PS3/PS4 to NEOGEO Converter.


- ⚠ **NOTE** : The update must be done on a PC; it cannot be done on a console.
- ⚠ **NOTE** : Make sure your PC is connected to the internet.
- ⚠ **NOTE** : Make sure the switch on the converter is switched to XID before doing firmware update.
When playing on NEOGEO, switch back to NEOGEO.

STEP 1 Download the update file from “**Download**” on Brook website:

www.brookaccessory.com




STEP 2 Press and hold the **Converter Button**. While pressing, connect USB to computer.

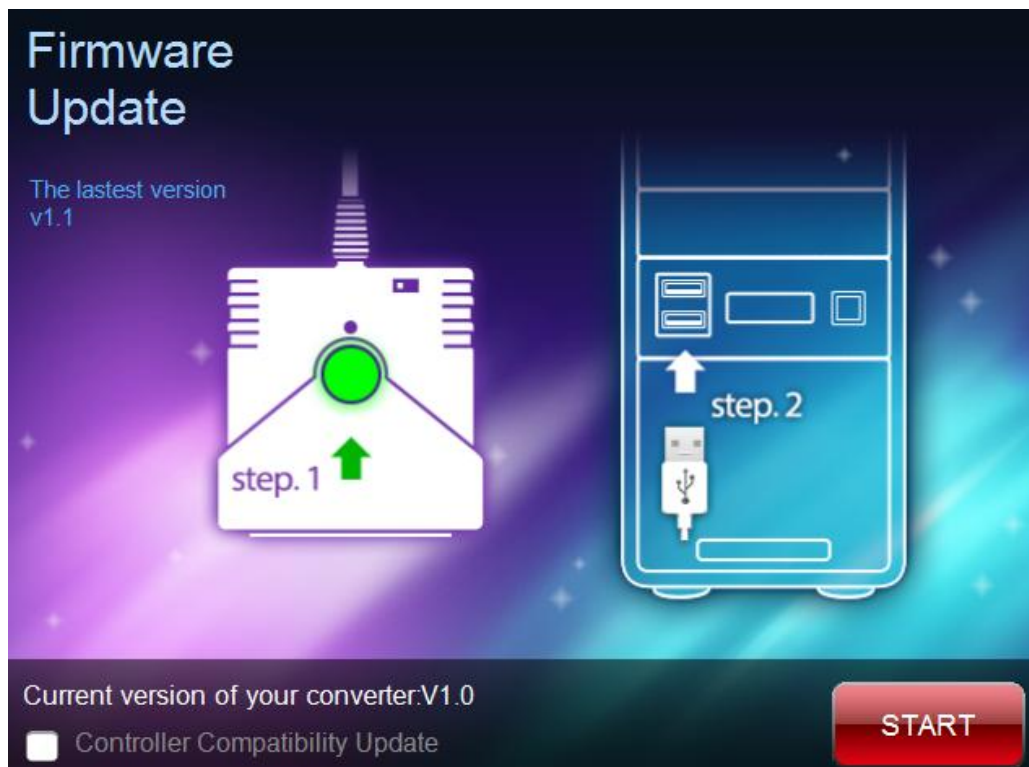


STEP 3 When the **Update** icon is enabled, click the icon to start update.



STEP 4 **DO NOT** disconnect during the update process.

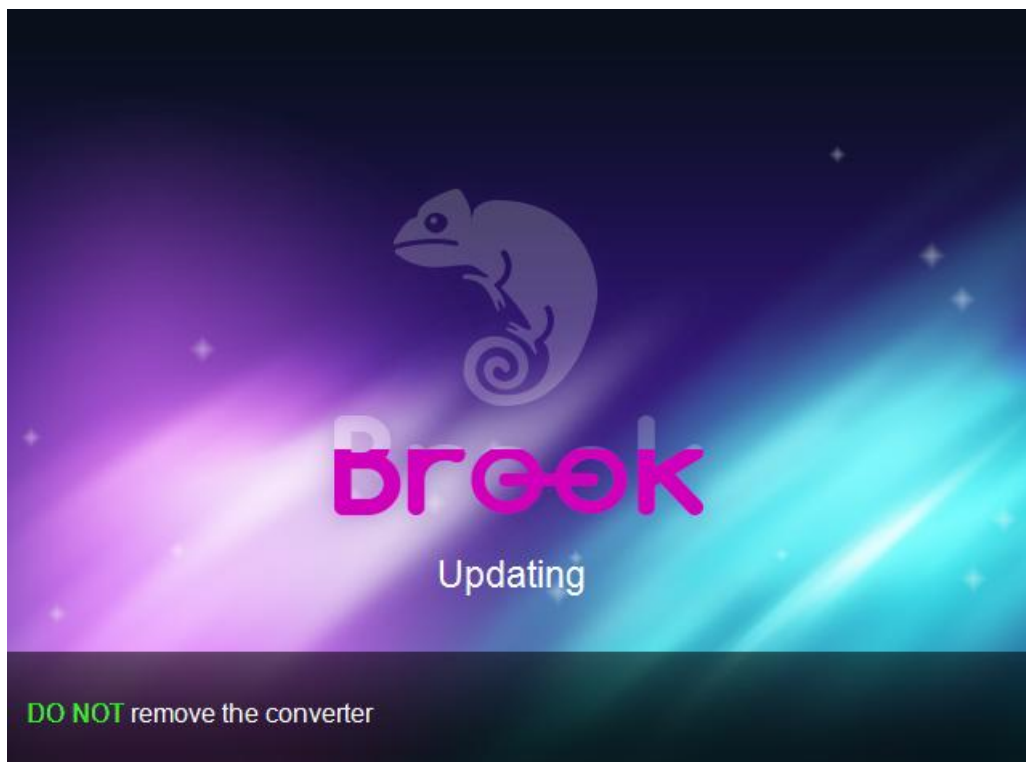

STEP 5 The following screen will be shown the update has successfully finished.

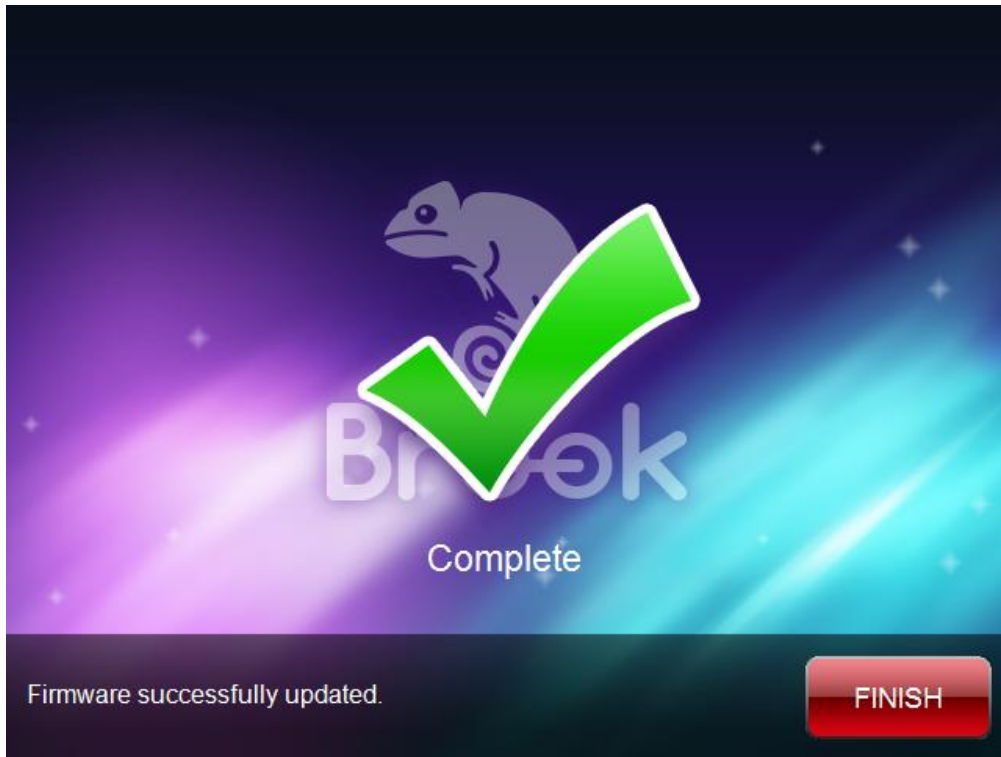

STEP 6 In case firmware update fails, the following screen will show, and please try to redo the setup from the beginning.

We recommend that you visit our website www.brookaccessory.com and download the update file again before restarting the update.



STEP 7 When the converter is upgraded to version 1.1, the default mode is Type C, and you can press combo keys on your PS3/PS4 controller to switch between Type A, Type B and Type C.

- (1) PS + R1(D) → Type C
- (2) PS + Triangle (D) → Type A
- (3) PS + Circle (D) → Type B

